

# Saluna 10 m

SOLAR STREET LIGHT

DATASHEET



SOLAR STREET LIGHT

## Saluna 10 m

### DATA SHEET

The Saluna Series features an integrated luminaire design for modern solar street lighting, delivering a clean, unified appearance. It offers high solar efficiency and smart control functions, ideal for customized outdoor installations.

#### Lighting Performance

Material	Aluminum
Power(W)	80W
CCT(K)	2200-5700K
Efficiency (Lm/W)	160lm/W(up to 180lm/W) @4000K
CRI (Ra)	Ra ≥ 70
Integral Luminous Flux	14400lm

#### Battery Technology

Material	LiFePO <sub>4</sub> Battery
Capacity	12v140Ah
Operating Temperature	-20°C to 75°C


#### PV Components

Type	Crystalline-silicon (c-Si) solar cells
Efficiency	≥ 16.6%
Cell Efficiency	23%
Rated Power (Pmpp)	25W (per panel)
Total Curved PV Panels	8 pcs
Total Rated Power	200W
Open-Circuit V (Voc)	21.76V
Voltage @ Pmax (Vmp)	18.56V
Short-Circuit I (Isc)	1.42A
Current @ Pmax (Imp)	1.35A
Operating Temperature	-40°C to 85°C

#### Smart Control & Efficiency

Operating Modes	light control+time control
Operating Time	0-2 h 100 %; 2-4 h 50 %; 4-10 h 20 %; 10-12 h 50 %.

Valid as of the release date. Latest version prevails.

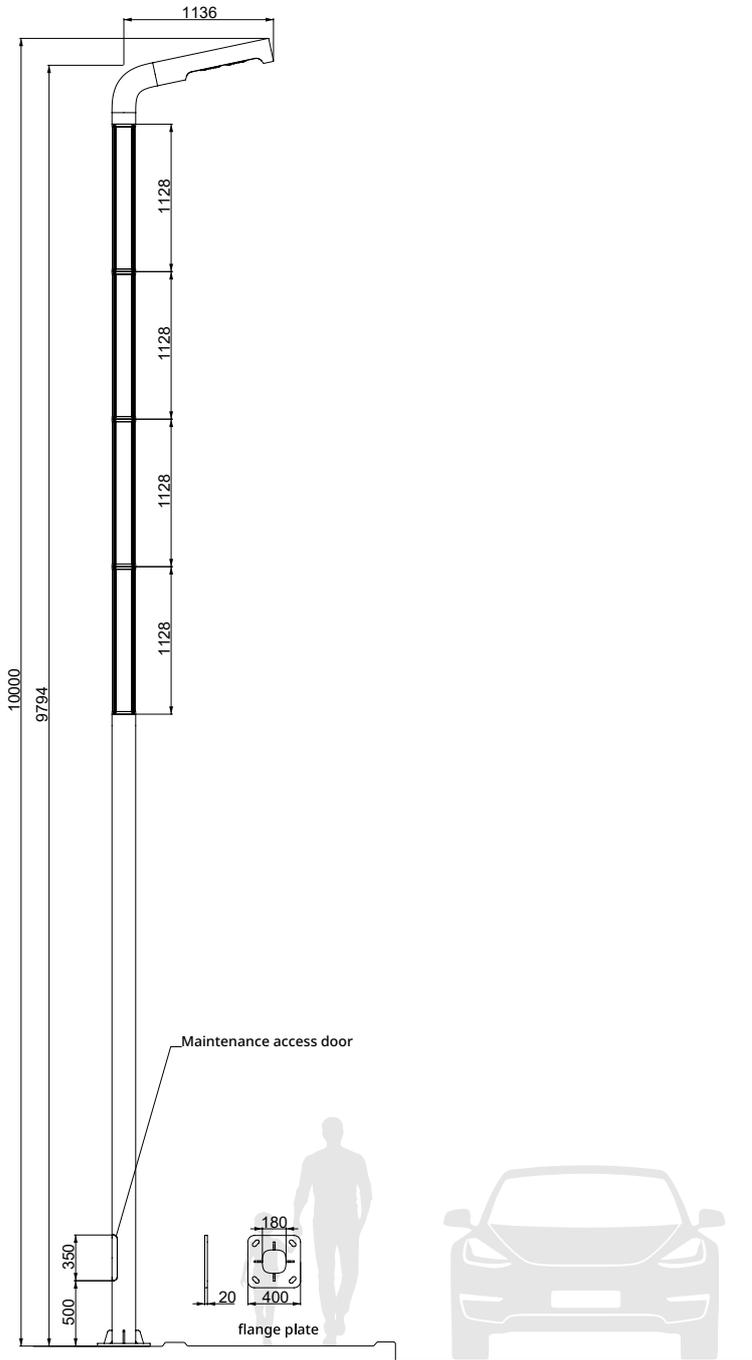

All dimensions are in mm.

### Pole Structure

Material	Steel
Dimensions	Φ 180mm*4mm*10000mm
Shape	Squircle
Coating	Hot-dip galvanized , optional powder coating (color customizable).

